

# ZenSo Ergo-line

**19107** The ZenSo Ergo-line chair is equipped with a relax mechanism that has been especially developed for the care sector. The Ergo-line mechanism makes sure that the backrest, seat and legrest simultaneously tilt into a “zero gravity” position.

## Support

- Firmly welded steel construction in round tube  $\varnothing$  27 mm wall thickness 2,5 mm.
- Finished with epoxy coating.
- All edges and corners have been rounded.
- The legs are equipped with synthetic glides.

## Backrest

- Made of an ergonomically preformed plywood shell of 12 mm.
- Upholstered with fire-retardant foam in 2 different density zones to guarantee an excellent seat comfort.
- Fully upholstered with decorative stitching.

## Seat and legrest

- Seat and legrest are 1 piece, easy removable without needing any tools.
- Seat and legrest are made of MDF board of 12 mm, covered with fire-retardant HR foam with 3D structure to guarantee an excellent seat comfort.
- Fully upholstered with decorative stitching.
- The rounded seat in front stimulates a fluent blood circulation.
- Optimal leg support, thanks to the telescopic legrest (+70 mm) which also prevents wrinkles in the upholstery.
- Free choice of seat height thanks to a spacer (42,5 cm, 45 cm or 47,5 cm).
- Choice between 2 different seat depths: 46 cm (small) or 50 cm (large).

## Lowerable armrests

- The ergonomic front design of the synthetic armrests makes it easy to stand up or sit down.
- Standard equipped with dinner tray attachments.
- Two solid epoxy-coated steel axes to adjust the armrests in height in 4 different positions.
- Locked downwards by means of a spring lever.
- In their lowest position, the armrests are on the same level as the seat.

## Ergo-line mechanism:

- Makes sure that the backrest, seat and legrest simultaneously tilt into a *zero gravity* position (\*).
- The angle between the seat and backrest ranges from 93° (seating position) to 119° (*'zero gravity'* position).
- When the relax mechanism is activated, the seat inclines to a 22 degree angle.
- A gas spring minimizes the necessary activation strength of the mechanism.
- Thanks to a lever on the right side, it is possible to lock the chair in every position.
- When the chair is put in the seat position, the legrest will be turned inwards so that you can stand up without any problem.

## Colours

We would like to refer to our extensive colour gamut.  
Sample card + samples available on request.

## Accessories

We would like to refer to our  
accessorylist.

(\*) “Zero gravity” position: this seat/lying position is based on NASA data. A neutral body position converts all muscle power into a biomedical balance.


Source: “From outer space to you”, Omni, March 1994.



## Dimensions

### ZenSo Ergo-line:

- L 68 x D 71-151 cm
- Height: depends on the height of the backrest
- Safe working load: 150 kg

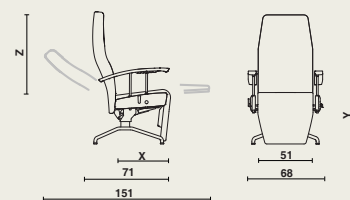

### Dimensions

Seat depth X	Seat height Y	Backrest height Z	Suitable for body type
46 cm	42,5 cm	84 cm	< 164 cm
46 cm	45 cm	84 cm	164 - 176 cm
50 cm	45 cm	84 cm	
50 cm	47,5 cm	84 cm	> 176 cm

## Materials and finishing

- Wood: Plywood, MDF
- Metal: epoxy coating (black).
- Synthetic material.
- Fire-retardant foam.
- Upholstery: see collection.
- Resistant to the common cleaning products.

For further information about used **materials**, **constructions** and **maintenance**: consult our materialfiles.

## Options

- Seat cushion with visco-elastic foam and a bi-elastic cover.
- Legrest with anatomical reduction cushion.
- Backrest with removable headrest.
- Accessory brackets.
- Restraint bracket.
- Dinner tray support on backrest.
- Raising & sitting aid.
- Castors  $\varnothing$  65 mm / castors  $\varnothing$  100 mm + footrest.
- Closed, upholstered sides.
- Closed, upholstered sides with armrests in wood / synthetic material.

